

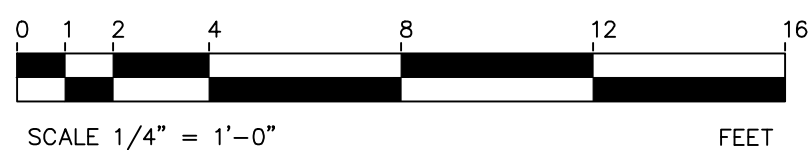


## NOTES

- A. COORDINATE ALL WORK WITH OTHER TRADES AND THE PROJECT MANAGER.
- B. ELECTRICAL CONTRACTOR SHALL FIELD VERIFY ALL CONNECTION REQUIREMENTS (HP, AMPS, VOLTAGE, PHASE AND DISCONNECTING MEANS), FOR ALL EQUIPMENT SUPPLIED BY OTHERS.
- C. VERIFY LOCATION AND MOUNTING HEIGHT OF ALL DEVICES WITH THE ARCHITECT/OWNER PRIOR TO ROUGH-IN.
- D. RGS CONDUIT SHALL BE USED IN ALL EXTERIOR LOCATIONS.
- E. MINIMUM CONDUIT SIZE SHALL BE 1/2".
- F. MINIMUM WIRE SIZE SHALL BE #12 THHN/THWN CU.
- G. REFER TO THE PANEL SCHEDULES ON SHEET E4.0 FOR CONDUIT/WIRE SIZE AND LOAD DESIGNATIONS. THERE SHALL BE NO SHARED NEUTRALS.
- H. ALL EXTERIOR RECEPTACLES SHALL BE FURNISHED WITH A METALLIC TAYMAC COVER, TO COMPLY WITH N.E.C. 406.8(B)(1).
- I. ALL CONDUIT SHALL BE ROUTED IN THE CEILING SPACE AND STUBBED UP TO THE EQUIPMENT/DEVICE ON THE ROOF.
- J. ALL DISCONNECT SWITCHES SHALL BE MOUNTED TO SATISFY N.E.C. CLEARANCE REQUIREMENTS.

**FOR BID ONLY**

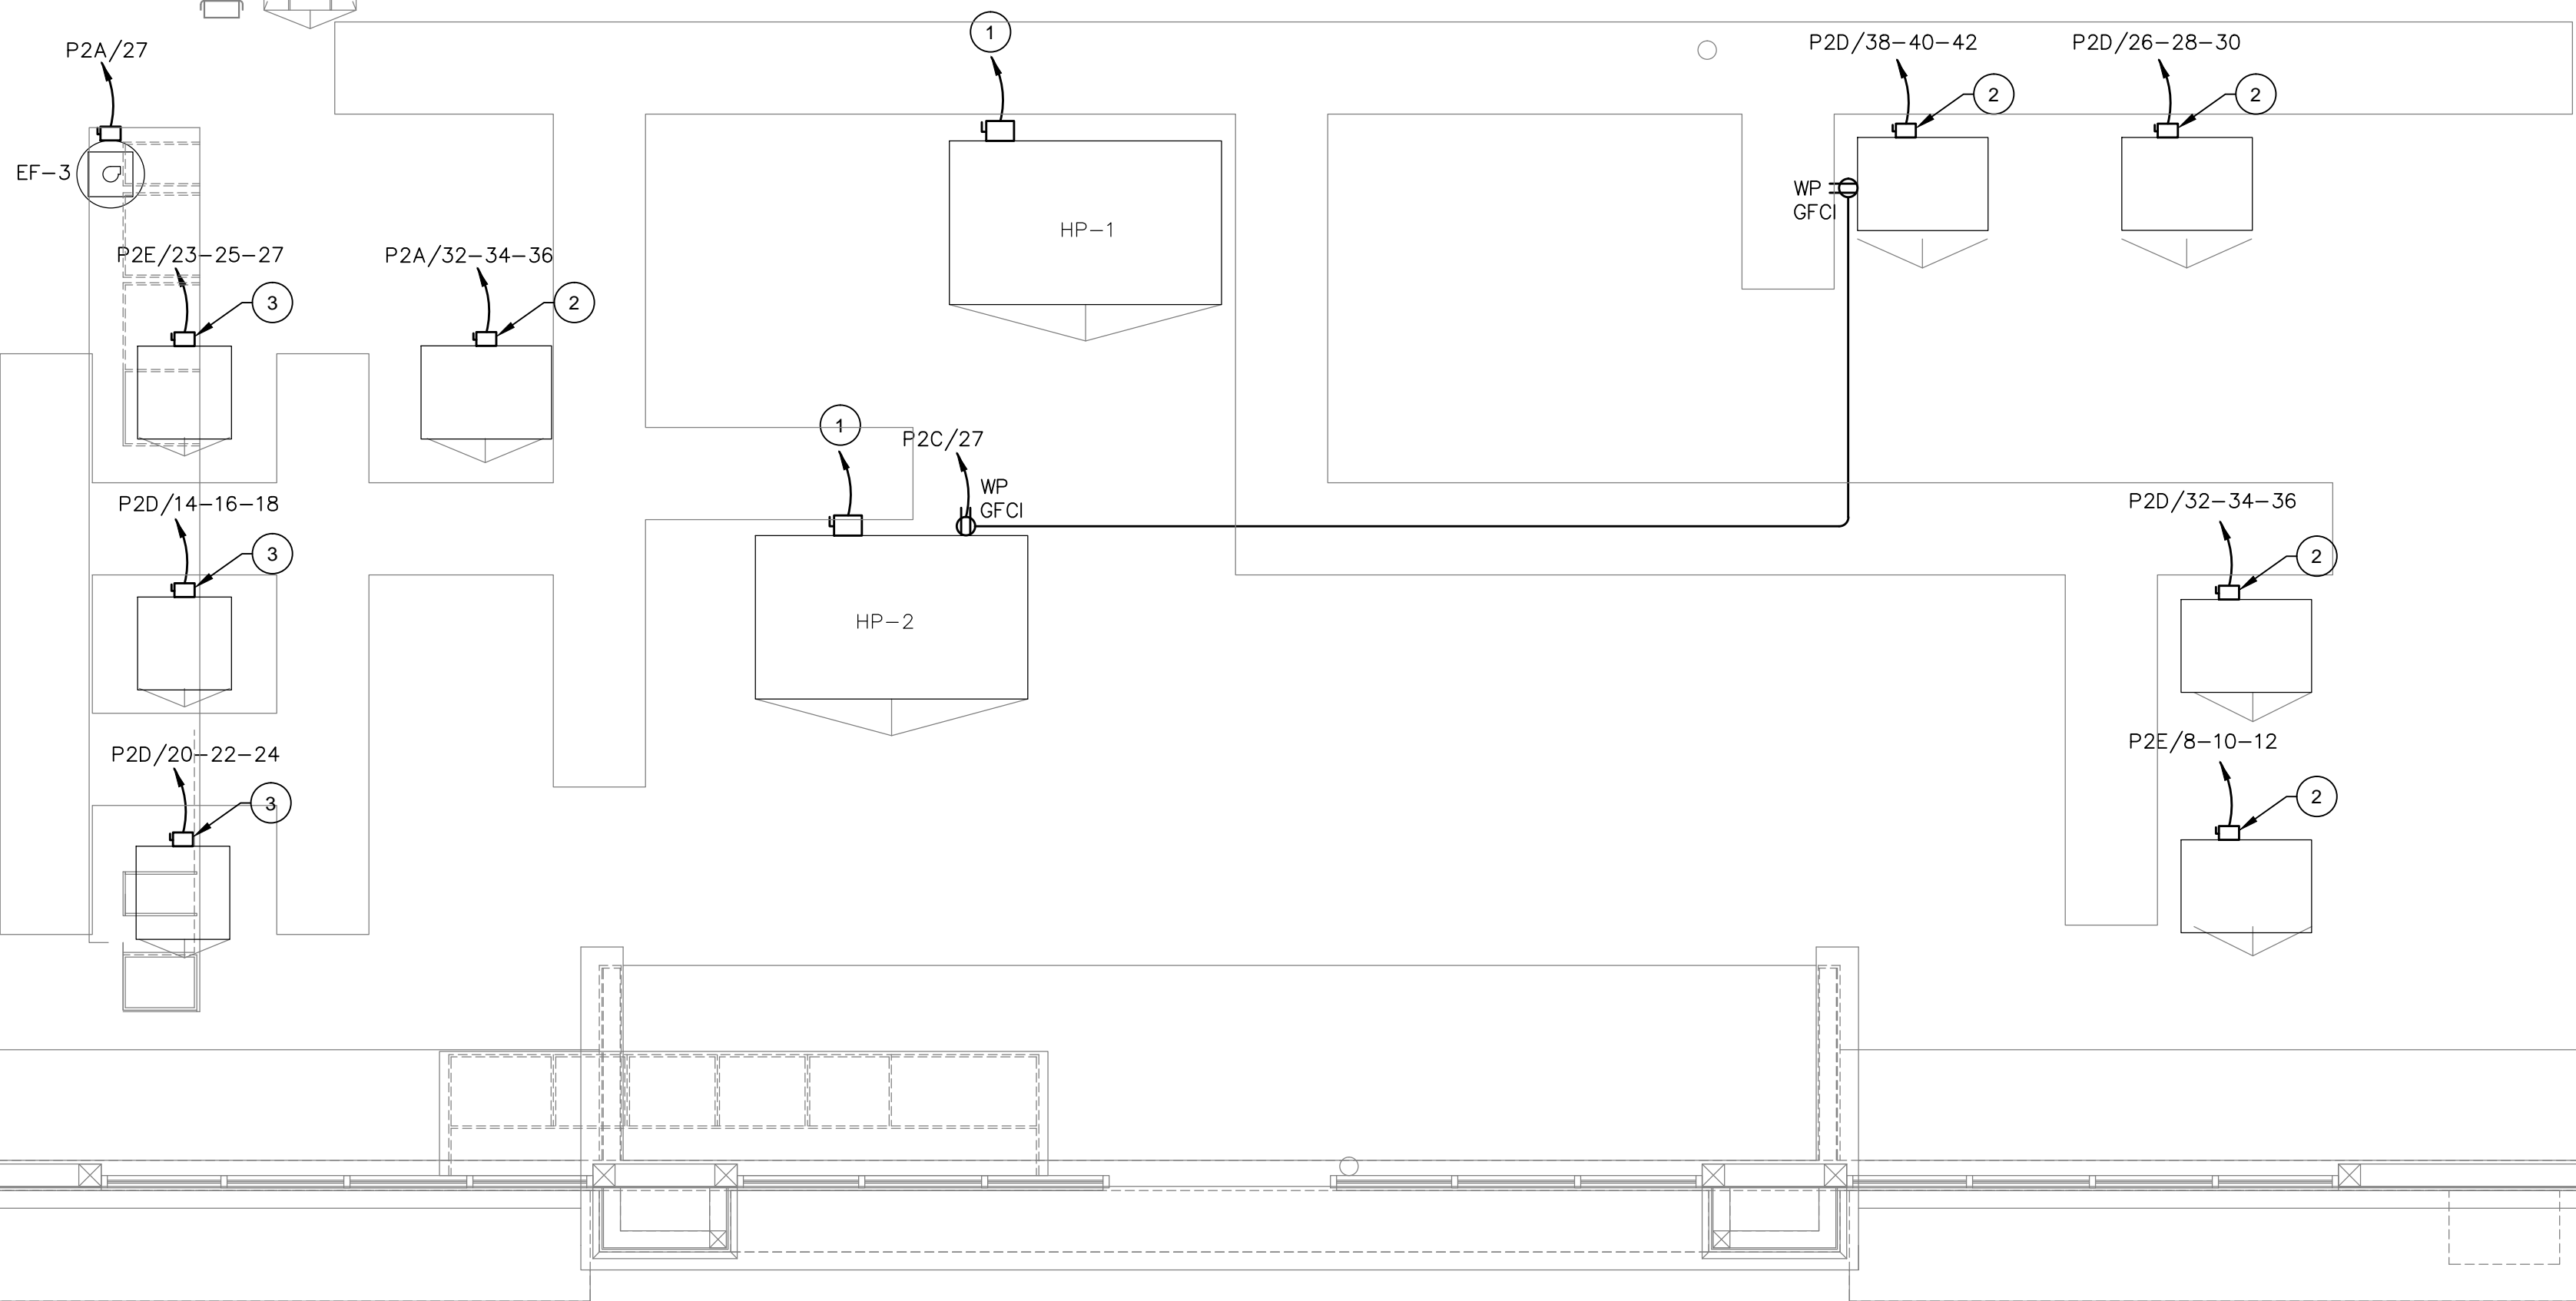

**E1** | ROOF POWER PLAN

$$1/4'' = 1' - 0''$$