




**FOR BID ONLY**

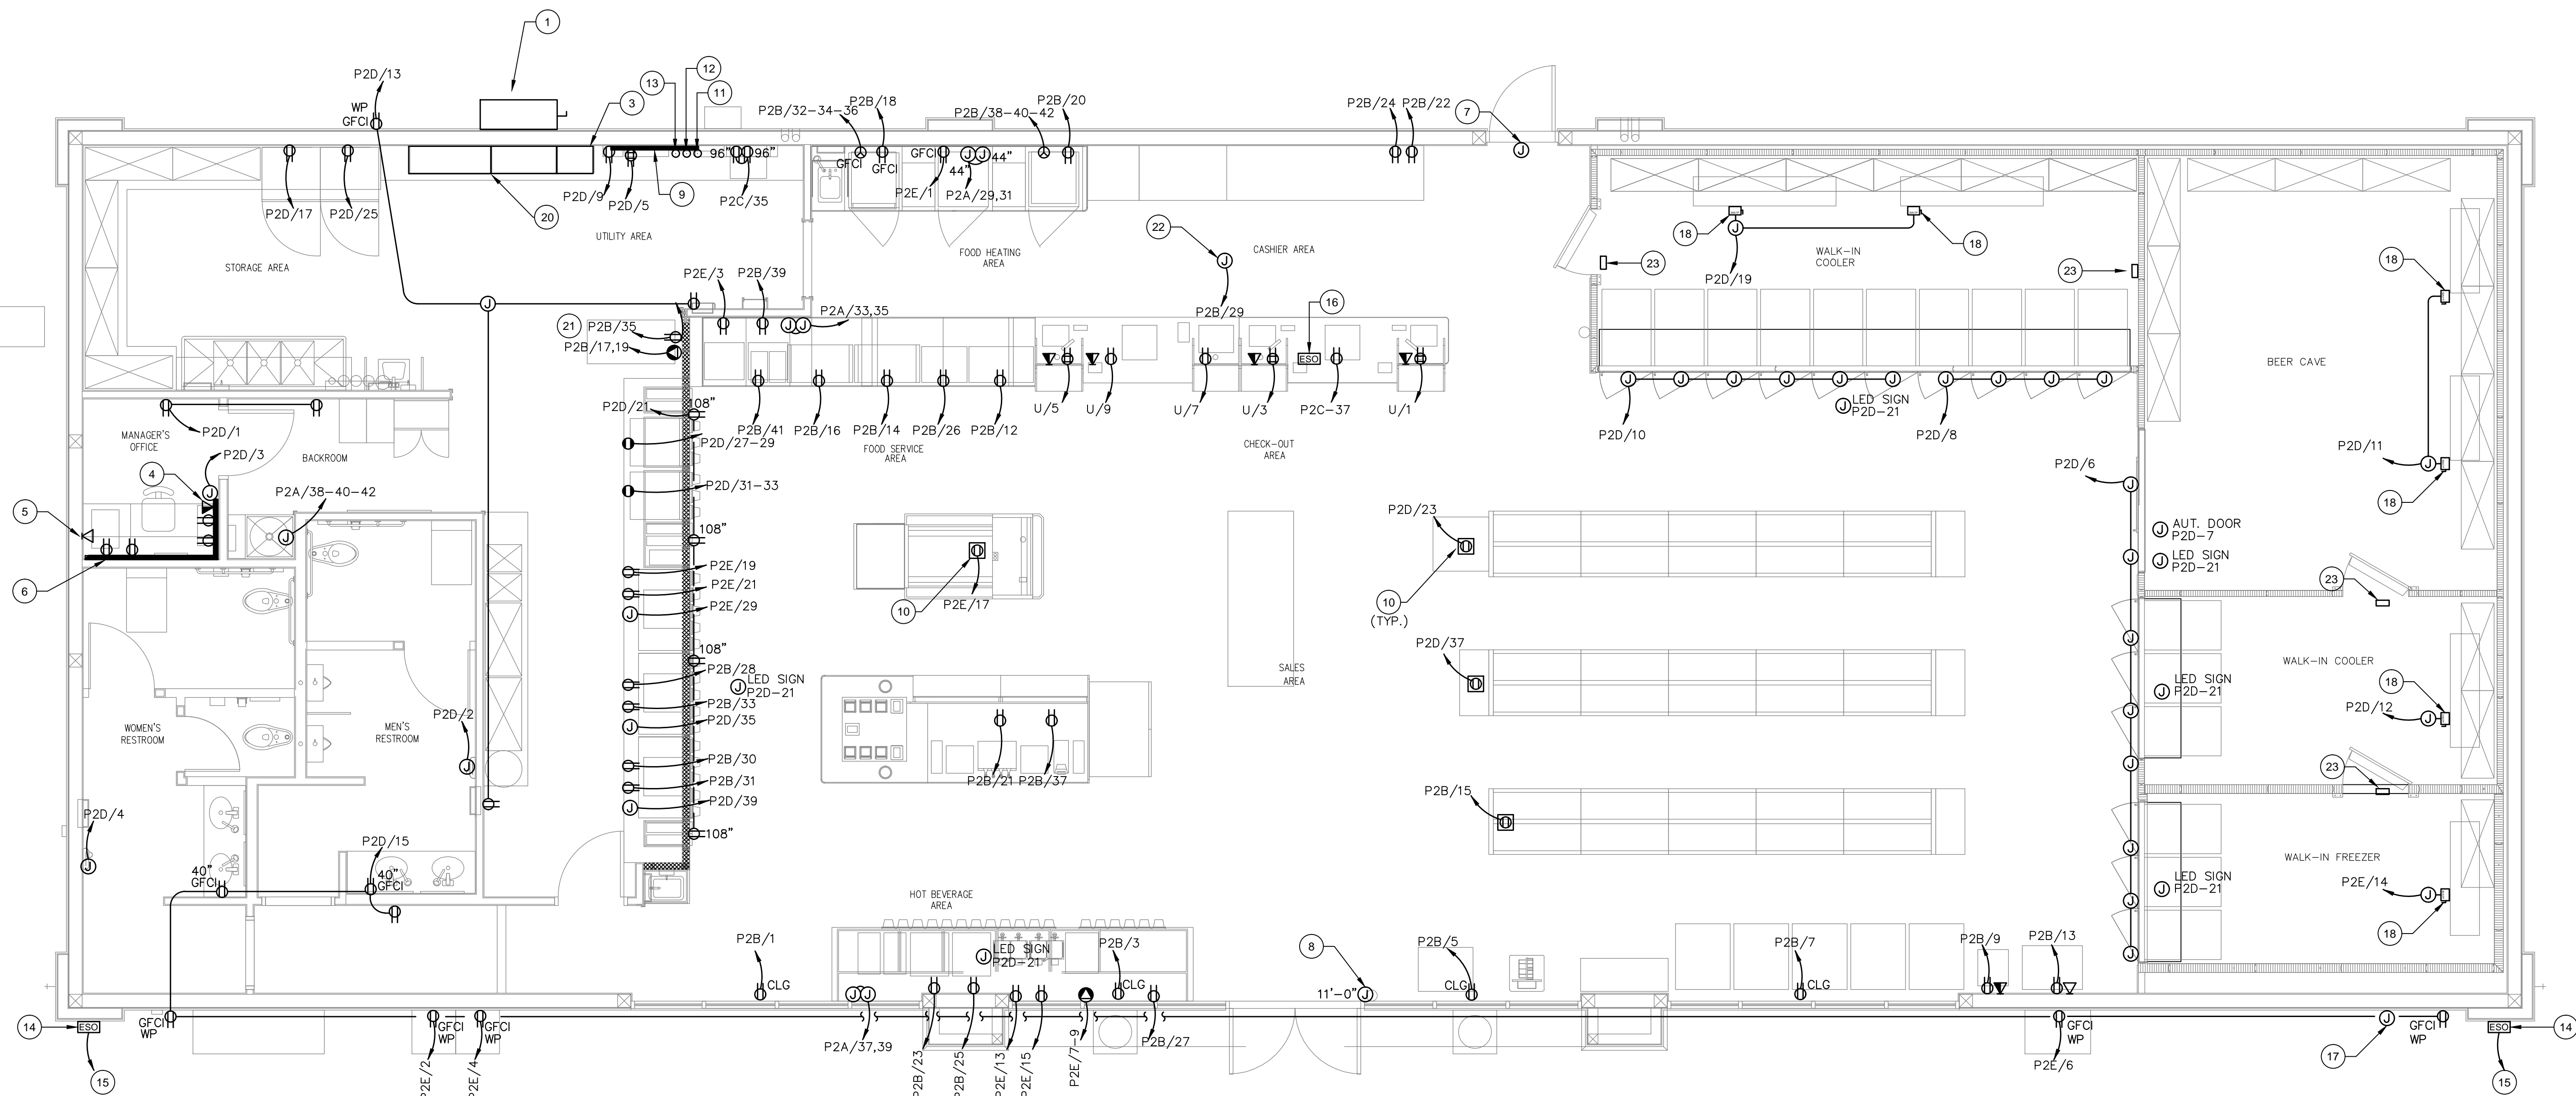

## ○ KEYED NOTES

- A. COORDINATE ALL WORK WITH OTHER TRADES AND THE PROJECT MANAGER.
- B. ELECTRICAL CONTRACTOR SHALL FIELD VERIFY ALL CONNECTION REQUIREMENTS (HP, AMP, VOLTAGE, PHASE AND DISCONNECTING MEANS), FOR ALL EQUIPMENT SUPPLIED BY OTHERS.
- C. VERIFY LOCATION AND MOUNTING HEIGHT OF ALL DEVICES WITH THE ARCHITECT/OOWNER PRIOR TO ROUGH-IN.
- D. ALL RECEPTACLES WITHIN 6'-0" OF A SINK AND LOCATED AT FOOD SERVICE AREA AND BEVERAGE COUNTERS SHALL BE GFCI TYPE.
- E. RGS CONDUIT SHALL BE USED IN ALL EXTERIOR LOCATIONS.
- F. MINIMUM CONDUIT SIZE SHALL BE 1/2".
- G. MINIMUM WIRE SIZE SHALL BE #12 THHN/THWN CU.
- H. REFER TO THE PANEL SCHEDULES ON SHEET E4.0 FOR CONDUIT/WIRE SIZE AND LOAD DESIGNATIONS. THERE SHALL BE NO SHARED NEUTRALS.
- I. CONTRACTOR SHALL PROVIDE AND INSTALL RECEPTACLES FOR ALL EQUIPMENT, TO MATCH VENDOR FURNISHED PLUGS.
- J. CONDUITS ENTERING THE COOLER AND FREEZER ENCLOSURE SHALL BE FILLED WITH AN APPROVED MATERIAL TO PREVENT THE CIRCULATION OF WARM AIR TO A COLDER SECTION OF THE CONDUNTS.
- K. ALL EXTERIOR RECEPTACLES SHALL BE FURNISHED WITH A METALLIC TAYMAC COVER, TO COMPLY WITH N.E.C. 406.8(B)(1).
- L. ALL DISCONNECT SWITCHES SHALL BE MOUNTED TO SATISFY N.E.C. CLEARANCE REQUIREMENTS.
- M. PROVIDE HOMERUN CONDUITS AS FOLLOWS:
  - FRAME RACK TO BACK OFFICE
  - FRAME RACK TO RM
  - FRAME RACK TO POS - SALES COUNTER
  - BACK OFFICE TO POS - SALES COUNTER(ACCOMMODATE SECURITY INTERFACES AS WELL)

1. NEW 1200/1000A AND 400/400A DISCONNECTS, 208Y/120V, 3Ø, 4W, NEMA 3R, MAIN ELECTRICAL SERVICE EQUIPMENT. REFER TO SHEET E3.0 FOR ONE-LINE DIAGRAM.
2. NEW GPI INTEGRATED PANEL AND CONTROL SYSTEM INCLUDING ELECTRICAL PANELS, DISPENSER CONTROLLER, DISPENSER ISOLATION, EMERGENCY SHUT-OFF CONTROLS, AND OUTDOOR LIGHTING CONTROLS. REFER TO SHEET E3.0 FOR ONE-LINE DIAGRAM.
3. NEW PUMP CONTROLLERS AND DATA DISTRIBUTION BOX.
4. NEW PHONE/DATA OUTLET, (TYPICAL). CONTRACTOR SHALL PROVIDE AND INSTALL NEW 3/4" C. WITH PULLSTRING, FROM BACK BOX TO 6" ABOVE DROPPED CEILING, AND A 90 DEG. SWEEP FOR PHONE/DATA WIRING BY OTHERS.
5. NEW DATA OUTLET, (TYPICAL). CONTRACTOR SHALL PROVIDE AND INSTALL NEW 3/4" C. WITH PULLSTRING, FROM BACK BOX TO 6" ABOVE DROPPED CEILING AND A 90 DEG. SWEEP, FOR DATA WIRING BY OTHERS.
6. NEW WIREMOLD WITH DEVICES CONFIGURED AS SHOWN.
7. BATTERY OPERATED DOOR ALARM.
8. CONTRACTOR SHALL PROVIDE AND INSTALL J-BOX ON WALL AND 3/4" CONDUITS WITH PULL ROPE TO J-BOXES IN BACK ROOM AND WALK-IN COOLERS FOR BATTERY OPERATED "ROBAND" DOOR CHIME. VERIFY EXACT REQUIREMENTS PRIOR TO ROUGH-IN.
9. NEW 2" x 4" x 3/4" PLYWOOD TELEPHONE MOUNTING BOARD. CONTRACTOR SHALL PROVIDE AND INSTALL NEW CU. BUS WITH 1 #6 CU. GND. TO THE GROUNDING ELECTRODE.
10. RECEPTACLE SHALL BE MOUNTED IN A FLOOR BOX. CONDUIT TO RECEPTACLE SHALL BE RUN UNDERGROUND AT 6" BELOW THE SLAB. FLOOR BOX COVER SHALL BE BRASS.
11. CONTRACTOR SHALL PROVIDE AND INSTALL NEW 1" C. WITH PULL ROPE TO TELEPHONE BACKBOARD FOR TELEPHONE/CATEGORY 5 CABLES.
12. CONTRACTOR SHALL PROVIDE AND INSTALL NEW 1" C. WITH PULL ROPE AS SPARE FOR FUTURE USE.

13. CONTRACTOR SHALL PROVIDE AND INSTALL NEW 1" C, WITH PULL ROPE TO COMMUNICATIONS RACK FOR TELEPHONE/CATEGORY 5 CABLES.
14. EMERGENCY SHUT-OFF SWITCH FOR PUMPS. ALTERNATE LOCATION PER SITE. VERIFY FINAL LOCATION.
15. CONTRACTOR SHALL PROVIDE AND INSTALL NEW 3/4" C, 2 #12 CU., 1 #12 CU. GND., TO IPaCS CONTROLS.
16. EMERGENCY PUMP SHUT-OFF SWITCH AND RESET AT CASHIER, (MOUNTED ON CASHIER COUNTER). CONTRACTOR SHALL PROVIDE AND INSTALL NEW 3/4" C, 4 #12 CU., 1 #12 CU. GND., TO IPaCS.
17. OVERFILL ALARM. REFER TO FUEL PLANS, (UNDER SEPARATE SUBMITTAL).
18. NEW 30A, 240VAC, NEMA 12, HEAVY DUTY, FUSED DISCONNECT SWITCH WITH FRN-R FUSES SIZED PER MANUFACTURER'S RECOMMENDATION.
19. NOT USED.
20. MAIN CIRCUIT BREAKERS INCLUDING HOUSEKEEPING PAD SHALL NOT BE MOUNTED HIGHER THAN 6'-8" AFF.
21. COORDINATE THE RECEPTACLE AND CIRCUIT BREAKER REQUIREMENTS WITH VENDOR PRIOR TO INSTALLATION.
22. J-BOX LOW VOLTAGE POWER SUPPLY FOR ELECTRICAL DOOR LOCK. CONTRACTOR VERIFY FINAL LOCATION WITH OWNER AND VENDOR PRIOR TO INSTALLATION.
23. LOW VOLTAGE DOOR LOCK SOLENOID ACTIVATED FROM COUNTER. VERIFY FINAL LOCATION AND REQUIREMENTS WITH LOW VOLTAGE VENDOR.
24. NOT USED.

# GreenbergFarrow

1430 W. Peachtree St., Suite 200  
Atlanta, GA 30309  
t: 404 601 4000 f: 404 601 3980

**COPYRIGHT NOTICE**

This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional.

### ISSUE/REVISION RECORD

DATE	DESCRIPTION
02/13/15	PERMIT SET

**PROFESSIONAL SEAL**



2/16/15

**PROFESSIONAL IN CHARGE**

GUIDO INOA ALVAREZ

**PROJECT MANAGER**


## QUALITY CONTROL

GUIDO INOA ALVAREZ

**DRAWN BY**

**PROJECT NAME****CIRCLE K  
STORES, INC.****ALBUQUERQUE**  
**NEW MEXICO**

**4400 COORS BLVD. SW  
ALBUQUERQUE, NM 87121**



CIRCLE K STORES INC

PROJECT NUMBER

20130791

**SHEET TITLE**

FLOOR  
POWER PLAN

**SHEET NUMBER**

## E2.0