CEILING PLAN KEY NOTES

1. ROOF MOUNTED EQUIPMENT NEEDS TO BE PLACED BEFORE FINAL TAPE OF SHEET ROCK SOFFITS TO PREVENT CRACKING.
2. COOLER LIGHTING PER MFG. VERIFY W/ COOLER MFG. FOR ACCEPTABLE ATTACHMENT METHODS.
3. SOFFIT VENT, SEE WALL SECTION A1/A10.0.
4. SECURITY SYSTEM DESIGNED AND PROVIDED BY CIRCLE K. CONTRACTOR TO COORDINATE WITH CIRCLE K FOR FINAL SECURITY CAMERA LOCATIONS.
5. CONTRACTOR TO VERIFY MUSIC & SPEAKERS LAYOUT WITH CIRCLE K REPRESENTATIVE. CONTRACTOR TO PULL ALL SPEAKER WIRE FOR STORE AND CANOPY.
6. DESIGN–BUILD METAL AWNING, SEE WALL SECTION A2/A10.0.
7. MOTION SENSOR SHALL BE PROVIDED AT BACKROOM AND OFFICE. MOTION SENSORS AND SOUND SENSORS SHALL BE PROVIDED AT RESTROOMS.
8. G.C. TO PROVIDE TIMER IN COOLER.
9. G.C. TO PROVIDE ELECTRICAL CONNECTIONS TO LOW VOLTAGE TRANSFORMERS FOR GRAPHICS SIGNAGE ABOVE COOLER DOORS AND BEVERAGE AREA.

CEILING LEGEND

	EMERGENCY LIGHT		LAY–IN LED LIGHT FIXTURE. SEE ELECTRICAL.		SUPPLY AIR DIFFUSER, SEE MECHANICAL PLAN.		SUSPENDED 2'x4' GRID WITH WASHABLE LAY–IN VINYL CLAD SHEET ROCK TILE (1/4" THICK).
	8" RECESSED LED DOWN LIGHT AT RESTROOMS, SEE ELECTRICAL.		EMERGENCY LIGHT. SEE ELECTRICAL.		RETURN AIR GRILLE, SEE MECHANICAL PLAN		
	8" EXTERIOR RECESSED LED DOWN LIGHT		COOLER/FREEZER LIGHT. SEE ELECTRICAL.		EXHAUST OR RELIEF AIR VENT		TRACK LIGHTING, SEE ELECTRICAL PLANS FOR MORE INFORMATION
	ILLUMINATED EXIT SIGN		GYPSUM BOARD CEILING, SEE PLAN FOR HEIGHTS, CEILING TO BE SCREWED NOT NAILED TO AVOID SAGGING.		SECURITY CAMERA (INDICATES APPROXIMATE CAMERA LOCATIONS)		
+7'–6" A.F.F.	CEILING ELEVATION		CEMENT PLASTER SOFFIT AT EXTERIOR BUILDING FRONT, SEE WALL SECTIONS FOR HEIGHTS.				
	2"x4" RECESSED LED LIGHT FIXTURE, SEE ELECTRICAL.						
	EXTERIOR LIGHT FIXTURE. SEE ELEVATIONS FOR MOUNTING HEIGHT AND ELECTRICAL DRAWINGS FOR MORE INFORMATION.						
OS	OCCUPANCY SENSOR – DUAL TECHNOLOGY MOTION SENSOR (SOUND & MOTION) , SEE ELECTRICAL.						

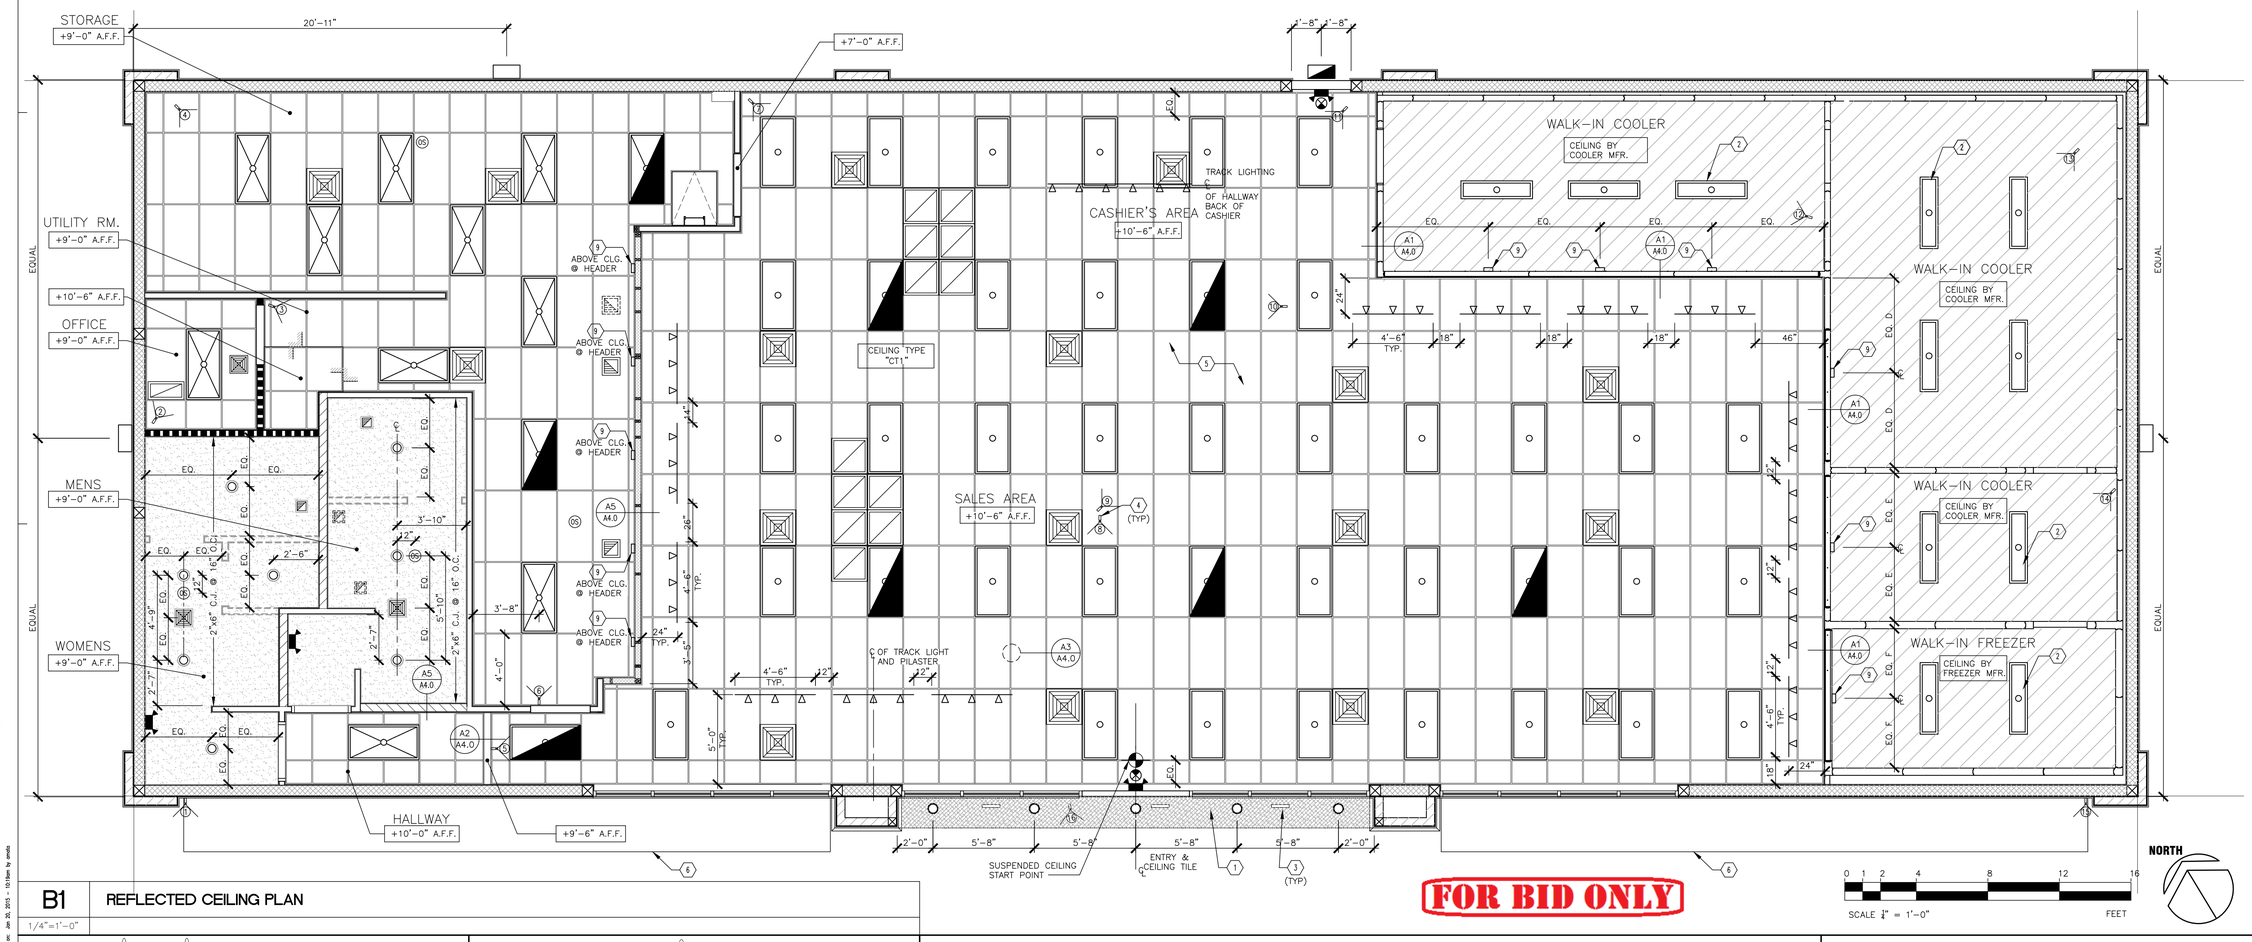

FOR BID ONLY

B1 REFLECTED CEILING PLAN

1/4"=1'–0"

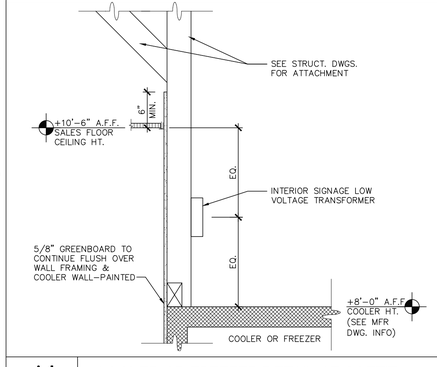

A1 COOLER OR FREEZER DETAIL AT SOFFIT

1"=1'–0"

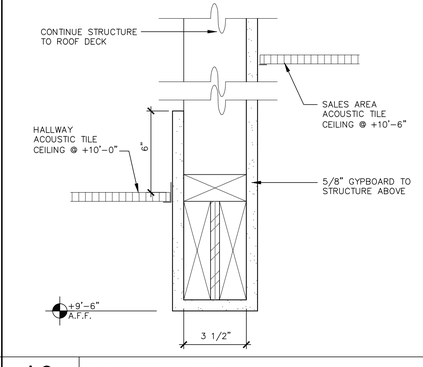

A2 DROPPED SOFFIT AT HALLWAY

3"=1'–0"

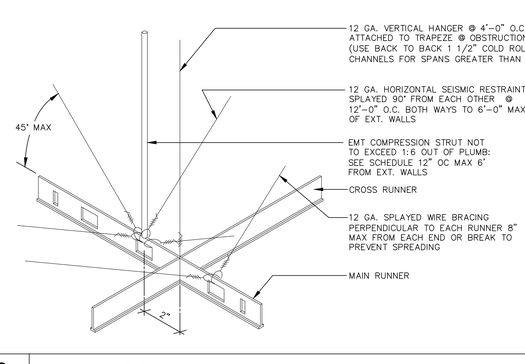

COMPRESSION STRUT SCHEDULE	
LENGTH	DIAMETER
UP TO 4'–0"	3/4"ø
5'–0"	1"ø
8'–0"	1–1/2"ø

NOTES:

1. ALL HANGERS & SUPPORTS TO BE ATTACHED WITH 4 TURNS IN 1 1/2" (TYP.)
2. SUPPORT EACH LIGHT FIXTURE INDEPENDENTLY OF CEILING GRID WITH 1–#12 WIRE AT TWO CORNERS DIAGONALLY ACROSS FROM ONE ANOTHER.
3. ALL MAIN AND CROSS TEES, THEIR SPLICES AND INTERSECTING CONNECTIONS SHALL BE ADEQUATE TO RESIST 72 lbs. IN TENSION.

A3 SPLAY WIRE DETAIL

3"=1'–0"



A5 UN–ATTACHED GRID AT WALL

1" = 1'–0"

GreenbergFarrow
1430 W. Peachtree St., Suite 200
Atlanta, GA 30309
t: 404 601 4000 f: 404 601 3980

COPYRIGHT NOTICE
This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional

ISSUE/REVISION RECORD

DATE	DESCRIPTION
01/19/15	PERMIT SET

PROFESSIONAL SEAL

PROFESSIONAL IN CHARGE
HUGHES THOMPSON
PROJECT MANAGER
OSCAR FLORES
QUALITY CONTROL
WARREN DRURY
DRAWN BY
ARMANDO MATA

PROJECT NAME

CIRCLE K STORES, INC.

COLORADO SPRINGS COLORADO

E. FOUNTAIN BLVD & ACADEMY PARK LOOP

CIRCLE K STORES INC.

PROJECT NUMBER
20130780

SHEET TITLE

REFLECTED CLG. PLAN - WITHOUT BEER CAVE

SHEET NUMBER

A4.0-CS

Drawing Name: P:\2013\20130780\06 Construction Documents - Chino Fwf Dwf\Prototype\A4.0-CS_BeforeAndAfterPlan.dwg Last Modified: Jan 20, 2015 - 10:39am Plotted on: Jan 20, 2015 - 10:39am by: ahata