


GRAPHIC SCALE

(IN FEET)
1 inch = 30 ft

PROPOSED

 BOUNDARY LINE
 CONTOUR ELEVATIONS
 SILT FENCE (SEE DETAIL SHEETS)
 LIMIT OF DISTURBED AREA

PROJECT INFORMATION

THE PROPOSED PROJECT IS CONSTRUCTING A GAS STATION CONSISTING OF A 4,480 S.F. CONVENIENT STORE, AN OVERHEAD CANOPY WITH 8 PUMPING ISLANDS AND ASSOCIATED PARKING AREA.








ACREAGE OF SITE IS 1.96 ACRES.

DISTURBED ACREAGE OF SITE (INCLUDING OFF-SITE WORK) IS 2.80 ACRES.

ANTICIPATED CONSTRUCTION START DATE IS JUNE 2014 AND COMPLETION DATE IS NOVEMBER 2014

CIRCLE K CONTRACTOR TO TAKE APPROPRIATE MEASURES TO KEEP SEDIMENT FROM ESCAPING SITE AND ALL ACCUMULATED SEDIMENT SHALL BE CLEANED OUT AND REMOVED FROM SITE.

KEY NOTES

| | |
|---|---|
|  | VTC VEHICLE TRACKING CONTROL |
|  | SF SEDIMENTATION/SILT FENCE WITH WIRE SUPPORT |
|  | CFS COMPOST FILTER SOCK |
|  | CWA CONCRETE WASHOUT AREA |
|  | TS TEMPORARY STORAGE AREA |
|  | SSA STABILIZED STAGING AREA |
|  | RR RIP RAP PAD |

SEQUENCE OF CONSTRUCTION

PHASE I

1. INSTALL STABILIZED CONSTRUCTION ENTRANCES.
2. PREPARE TEMPORARY PARKING AND STORAGE AREA.
3. CONSTRUCT THE SILT FENCES ON THE SITE.
4. INSTALL EROSION LOG AS INDICATED ON THE PLAN
5. CLEAR AND GRUB THE SITE.
6. BEGIN GRADING THE SITE.

PHASE I

7. START CONSTRUCTION OF BUILDING PAD AND STRUCTURES.
8. TEMPORARILY SEED DENUDED AREAS.
9. INSTALL UTILITIES, UNDERDRAINS, STORM SEWERS, CURBS AND GUTTERS.
10. INSTALL EROSION LOG AS SHOWN ON THE PLANS.
11. INSTALL RIP RAP AROUND OUTLET STRUCTURES.
12. PREPARE SITE FOR PAVING.
13. PAVE SITE.
14. COMPLETE GRADING AND INSTALL PERMANENT SEEDING AND PLANTING.
15. REMOVE ALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES (ONLY IF SITE IS STABILIZED).

GENERAL EROSION NOTES

- A. ALL CONTRACTORS AND SUBCONTRACTORS INVOLVED WITH STORM WATER POLLUTION PREVENTION SHALL OBTAIN A COPY OF THE STORM WATER POLLUTION PREVENTION PLAN AND THE STATE OF NEW MEXICO NPDES GENERAL PERMIT FOR STORM WATER DISCHARGES AND BECOME FAMILIAR WITH THEIR CONTENTS.
- B. THE TEMPORARY PARKING AND STORAGE AREA SHALL ALSO BE USED AS THE EQUIPMENT MAINTENANCE AREA, EQUIPMENT CLEANING AREA, EMPLOYEE BREAK AREA, AND AREA FOR LOCATING PORTABLE FACILITIES, OFFICE TRAILERS, AND TOILET FACILITIES. THE EXACT LOCATIONS SHALL BE COORDINATED WITH THE OWNERS CONSTRUCTION MANAGER.
- C. ALL WASH WATER (CONCRETE TRUCKS, VEHICLE CLEANING, EQUIPMENT CLEANING, ETC.) SHALL BE DISPOSED OF IN A MANNER THAT PREVENTS CONTACT BETWEEN THESE MATERIALS AND STORM WATER THAT IS DISCHARGED FROM THE SITE.
- D. MAINTAIN ON THE SITE OR HAVE READILY AVAILABLE SUFFICIENT OIL AND GREASE ABSORBING MATERIALS AND FLOTATION BOOMS TO CONTAIN AND CLEAN-UP FUEL OR CHEMICAL SPILLS AND LEAKS.
- E. DUST ON THE SITE SHALL BE CONTROLLED BY SPRAYING WATER ON DRY AREAS OF THE SITE. THE USE OF MOTOR OILS AND OTHER PETROLEUM BASED OR TOXIC LIQUIDS FOR DUST SUPPRESSION OPERATIONS IS PROHIBITED.
- F. NO RUBBISH, TRASH, GARBAGE, OR OTHER SUCH MATERIALS SHALL BE DISCHARGED INTO DRAINAGE DITCHES OR OTHERS OF THE STATE.
- G. ALL STORM WATER POLLUTION PREVENTION MEASURES PRESENTED ON THIS PLAN, AND IN THE STORM WATER POLLUTION PREVENTION PLAN, SHALL BE INITIATED AS SOON AS PRACTICABLE.
- H. NEW OR AFFECTED CUT OR FILLED SLOPES MUST AT AN ANGLE THAT CAN BE RETAINED BY VEGETATIVE COVER, AND MUST BE PROVIDED WITH A GROUND COVER SUFFICIENT TO RETAIN EROSION WITHIN 21 CALENDAR DAYS OF COMPLETION OF ANY PHASE (ROUGH OR FINAL) OF GRADING.
- I. A PERMANENT GROUND COVER, SUFFICIENT RESTRAIN EROSION, MUST BE PROVIDED WITHIN THE SHORTER OF 18 WORKING OR 90 CALENDAR DAYS (IF IN A QUALITY AREA, THE SHORTER OF 18 WORKING OR 60 CALENDAR DAYS) AFTER COMPLETION OF CONSTRUCTION OR DEVELOPMENT ON ANY PORTION OF THE TRACT.
- J. IF THE ACTION OF VEHICLES TRAVELING OVER THE GRAVEL CONSTRUCTION ENTRANCES IS NOT SUFFICIENT TO REMOVE THE MAJORITY OF DIRT OR MUD, THEN THE TIRES MUST BE WASHED BEFORE THE VEHICLES ENTER A PUBLIC ROAD. WASHING AREA, THE SHORTER OF 18 WORKING OR 60 CALENDAR DAYS) MUST BE MADE TO INTERCEPT AND TRAP THE SEDIMENT BEFORE IT IS CARRIED OFF THE SITE. THE EXACT LOCATIONS SHALL BE COORDINATED WITH THE OWNERS CONSTRUCTION MANAGER.
- K. ALL MATERIALS SPILLED, DROPPED, WASHED, OR TRACKED FROM VEHICLES ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY.
- L. CONTRACTORS OR SUBCONTRACTORS WILL BE RESPONSIBLE FOR REMOVING SEDIMENT IN THE DETENTION POND AFTER THE STABILIZATION OF THE SITE. THE SEDIMENT MUST BE REMOVED FROM THE DETENTION POND AND THE DRAINAGE SYSTEMS. CONTRACTORS OR SUBCONTRACTORS WILL ALSO BE RESPONSIBLE TO CLEAN THE SWALE FROM ANY SEDIMENT IF NECESSARY.
- M. IF SOIL STOCKPILING IS EMPLOYED ON THE SITE, SILT FENCES SHALL BE USED TO HELP CONTAIN THE SEDIMENT.
- N. SLOPES SHALL BE LEFT IN A ROUGHENED CONDITION DURING THE GRADING PHASE TO REDUCE RUNOFF VELOCITIES AND EROSION.
- O. SEDIMENT BASINS ARE ATTRACTIVE TO CHILDREN AND CAN BE VERY DANGEROUS. IN ALL CASES, LOCAL ORDINANCES AND REGULATIONS REGARDING HAZARDOUS MATERIAL SAFETY MUST BE ADHERED TO.
- P. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE DISPOSED OF WITHIN 30 DAYS AFTER FINAL STABILIZATION. FINAL STABILIZATION HAS OCCURRED WHEN ALL SOIL DISTURBING ACTIVITIES ARE COMPLETED AND A UNIFORM PERENNIAL VEGETATIVE COVER WITH A DENSITY OF 75% OF THE EXISTING VEGETATION HAS BEEN ESTABLISHED AND AREAS NOT COVERED BY PERMANENT STRUCTURES HAS BEEN EMPLOYED.
- Q. DUE TO THE GRADE CHANGES DURING THE DEVELOPMENT OF THE PROJECT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTING THE EROSION CONTROL MEASURES (SILT FENCES, SILT DIKES, ETC.) TO HELP PREVENT EROSION AND STORM WATER POLLUTION.
- R. ALL OFF-SITE CONSTRUCTION SHALL BE STABILIZED AT THE END OF EACH WORKING DAY, THIS INCLUDES BACKFILLING OF TRENCHES FOR STORM DRAINS. ALL CONSTRUCTION AND PLACEMENT OF GRAVEL OR BITUMINOUS PAVS FOR ROAD CONSTRUCTION.

SURFACE STABILIZATION MEASURES


| KEY | PRACTICE | DESCRIPTION | NOTES |
|-----|---|---|---|
| M | DISTURBED AREA STABILIZATION (W/ MULCHING ONLY) | Temporary protection for disturbed areas; as an erosion retardant cover when temporary grassing is inapplicable. | Straw (1-2 tons/acre), Wood chips (5-6 tons/acre), Wood fiber (0.5-1 tons/acre), Bark (35 cm/acre), Corn stalks (4-6 tons / acre), or Neta/Mats/Chemical stabilizers applicable |
| TS | DISTURBED AREA STABILIZATION (W/ TEMP. SEEDING) | Planting rapid-growing annual grasses, small grains, or legumes to provide initial, temporary cover for erosion control on disturbed areas. | May-Aug: German millet (40 lbs./ac), Aug-Dec: Rye grain (120 lbs./ac), Jan.-May: Mixture of Rye grain (120 lbs./ac) and Kobe lespedeza (50 lbs./ac) and 750-1000 lbs./ac (or Fall) lbs./ac of 10-10-10 fertilizer |
| PS | DISTURBED AREA STABILIZATION (W/ PERM. SEEDING) | Control erosion and preventing erosion by establishing a perennial vegetative cover with seed. | Kobe lespedeza (50 lbs./ac) and Kobe lespedeza (40 lbs./ac) with 1000 lbs./ac of 10-10-10 fertilizer and 4,000 lbs./ac of lime May-Aug: Add 10-10-10 German millet Oct.-Feb: Add 40 lbs./ac Rye grain |
| SO | DISTURBED AREA STABILIZATION (W/ PERM. SODDING) | Transplanting vegetative sections of plant materials to promptly stabilize areas that are subject to erosion. | Warm Season: Hybrid Bermuda grass, Zoysia grass, Centipede grass, or St Augustine grass Cool Season: Tall fescue/Kentucky bluegrass |
| DC | DUST CONTROL | Utilize dust control methods whenever there are offsite impacts, especially periods of drought until final stabilization is reached. | Phasing the project, vegetative cover, Mulch, sprinkling water, spray-on-adhesive, calcium chloride, barriers, etc. |

| SOIL EROSION/SEDIMENTATION CONTROL OPERATION TIME SCHEDULE | |
|--|--------------------|
| 1 | Preconstruction |
| 2 | Construction |
| 3 | Postconstruction |
| 4 | Operation |
| 5 | Maintenance |
| 6 | Decommissioning |
| 7 | Reclamation |
| 8 | Monitoring |
| 9 | Reporting |
| 10 | Record Keeping |
| 11 | Training |
| 12 | Public Outreach |
| 13 | Emergency Response |
| 14 | Other |

NOTE: GENERAL CONTRACTOR TO COMPLETE TABLE WITH THEIR SPECIFIC PROJECT SCHEDULE

[illegible]

24 HR EMERGENCY CONTACT:
MIKE RUIZ- 915.595.0853

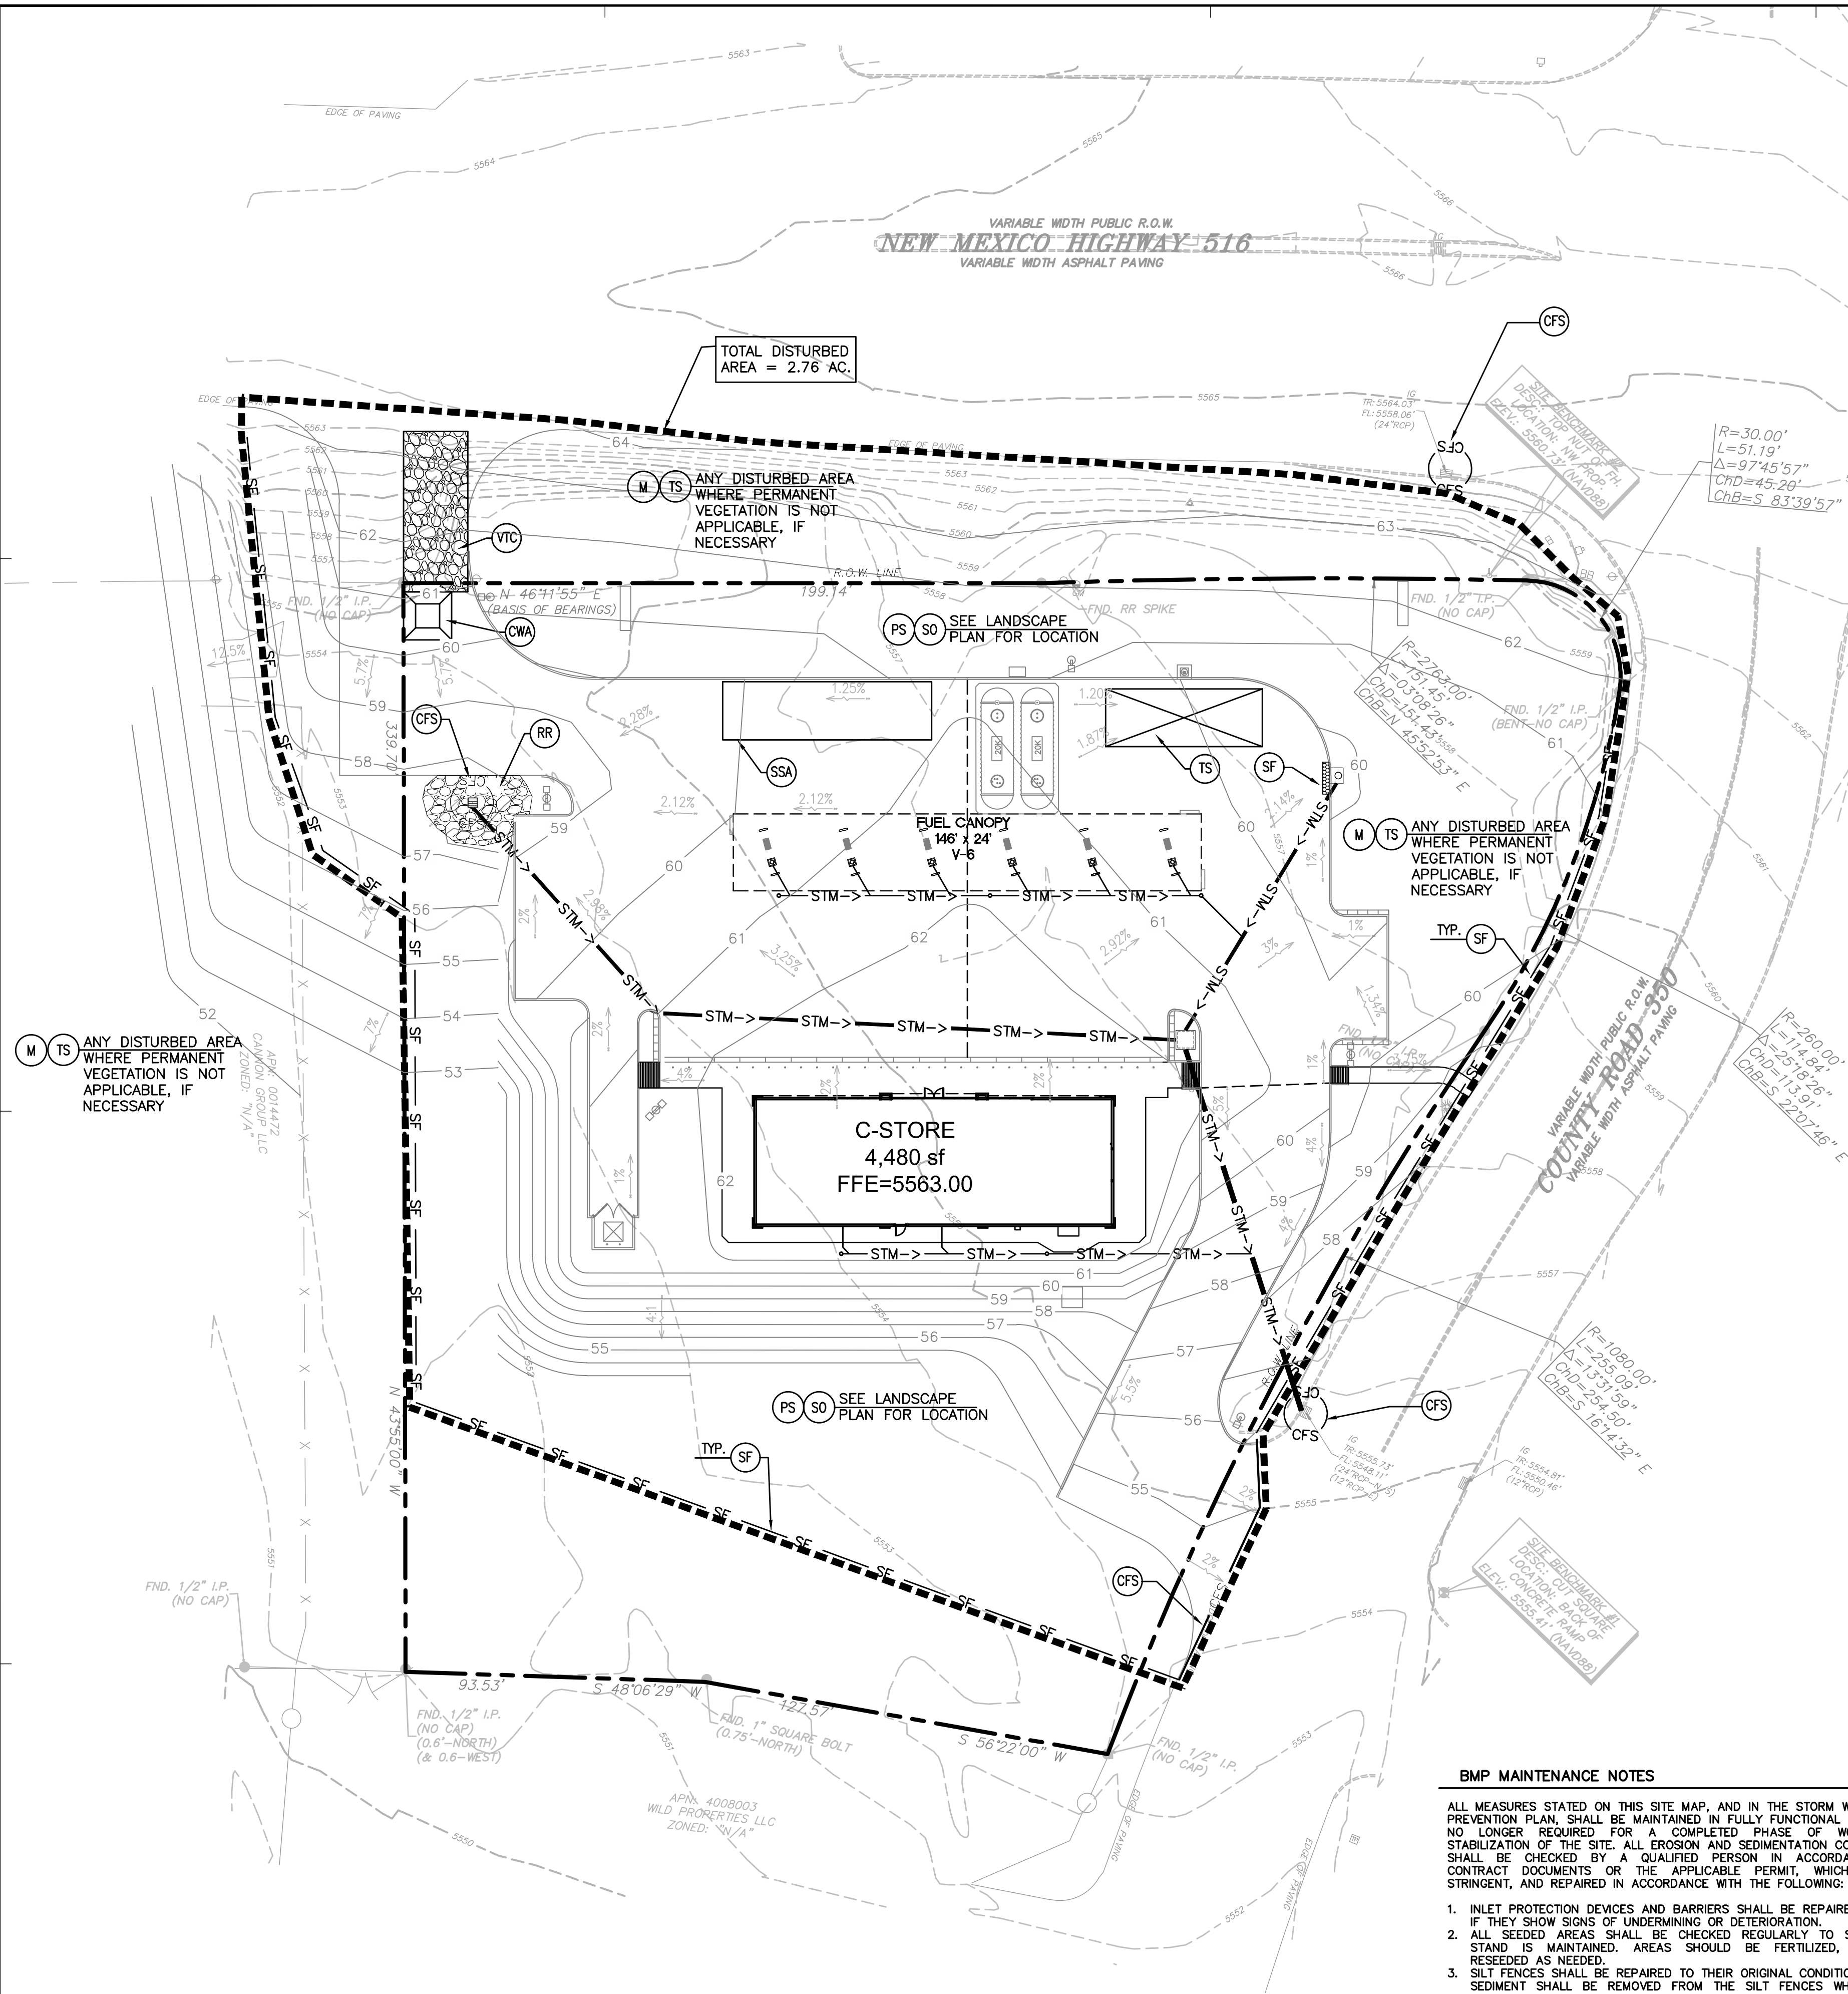

BMP MAINTENANCE NOTES

ALL MEASURES STATED ON THIS SITE MAP, AND IN THE STORM WATER POLLUTION PREVENTION PLAN, SHALL BE MAINTAINED IN FULLY FUNCTIONAL CONDITION UNTIL NO LONGER REQUIRED FOR A COMPLETED PHASE OF WORK OR FINAL STABILIZATION OF THE SITE. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE CHECKED BY A QUALIFIED PERSON IN ACCORDANCE WITH THE CONTRACT DOCUMENTS OR THE APPLICABLE PERMIT, WHICHEVER IS MORE STRINGENT, AND REPAIRED IN ACCORDANCE WITH THE FOLLOWING:

1. INLET PROTECTION DEVICES AND BARRIERS SHALL BE REPAIRED OR REPLACED IF THEY SHOW SIGNS OF UNDERMINING OR DETERIORATION.
2. ALL SEEDED AREAS SHALL BE CHECKED REGULARLY TO SEE THAT GOOD STANDS ARE MAINTAINED. AREAS SHOULD BE FERTILIZED, WATERED, AND RESEED AS NEEDED.
3. SILT FENCES SHALL BE REPAIRED TO THEIR ORIGINAL CONDITIONS IF DAMAGED.
4. SEDIMENT SHALL BE REMOVED FROM THE SILT FENCES WHEN IT REACHES THE TOP OF THE FENCE.
5. THE VEHICLE TRAVING CONTROL SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOW OF MUD ONTO PUBLIC RIGHTS-OF-WAY.
6. RIGHT-OF-WAY MAY BE DAMAGED BY PERIODIC TOP DRESSING OF THE CONSTRUCTION EXITS AS CONDITIONS DEMAND.
7. THE TEMPORARY PARKING AND STORAGE AREA SHALL BE KEPT IN GOOD CONDITION (SUITABLE FOR PARKING AND STORAGE). THIS MAY REQUIRE PERIODIC TOP DRESSING OF THE TEMPORARY PARKING AREA AS CONDITIONS DEMAND.
8. PRIOR TO LEAVING THE SITE, ALL VEHICLES SHALL BE CLEANED OF DEBRIS. ANY DEBRIS AND/OR OIL SPILLS ON THE PUBLIC STREET SHALL BE CLEANED IMMEDIATELY BY A METHOD OTHER THAN FLUSHING.